

SHRI VISHWAKARMA PACKAGING SOLUTIONS

(A PACKAGING HOUSE)

NEAR NAUGAJAPEER, VILLAGE KUMHARHEDA, DEHRADUN ROAD, SAHARANPUR 247001
(UTTAR PRADESH)

E-mail:- viswakarmapackaging16@gmail.com

Mobile no :- 9634298685, 8923034571

STRAPPING MACHINE

Automatic Strapping Machine:-



Technical Specification :

Model	Automatic SVP101F
Max Strap Size (mm)	800 x 600
Min Strap Size (mm)	80 x 50
Strapping Speed (seconds)	2
Strap Width (mm)	9 – 15
Strapping Force	25 – 700
Working Table Height (mm)	830
Power Source (V/Hz)	440/50,0.1.2HP
External Dimensions (mm)	1420X650X1565
Weight (kg)	235

Semi Automatic Strapping Machine:-



Technical Specification :

Model	SVP740H(Delux Model)
Cycle Time	1.5 sec/strap
tension range	15~45 kgs
Strap Width	6,9,12,15.5 adjustable
Sealing Method	Heating element
Reel Inside Diameter	200mm
Power Supply	220/50/PH
Table Height	780mm
Power Consumption	0.5 KW
Layout Dimension	L902 x D575 x H780mm
Weight	115 Kgs

Semi Automatic Strapping Machine:-



Technical Specification :

Model	svp360H(Feather Touch Model)
Strap Width	5-15 mm
Speed	1.5 Sec/strap
Power Supply	220/50/1-phase
Power Consumption	0.4 KW
Machine Tension	5-50kgs
Machine Dimension	895mm(l)x565mm(w)x740mm(h)
Weight	90 Kgs

Table Top Strapping Machine:-



Technical Specification :

Model	Table top Svp101 H
Max Strap Size (mm)	Not Stipulated
Min Strap Size (mm)	60 x 30
Strapping Speed (seconds)	1.5
Strap Width (mm)	6 - 15
Strap Force(Newton)	450
Working Table Height (mm)	750
Power Source (V/Hz)	220/50,0.25HP
External Dimensions (mm)	900X580X750
Weight (kg)	90

Low Table Top Strapping Machine:-



Technical Specification :

Model	Low Table Top Svp101L
Max Strap Size (mm)	Not Stipulated
Min Strap Size (mm)	60x30
Strapping Speed (seconds)	1.5
Strap Width (mm)	6 - 15
Strapping Force	450
Working Table Height (mm)	500
Power Source (V/Hz)	220/50,1/4HP
External Dimensions (mm)	900 X 580 X 500
Weight (kg)	85

CARTON SEALER

Automatic Packing Line :-



Technical Specification :

Model	Svp 102 PLS (Auto Packing Line)
Voltage (V/Hz)	AC 220/50
Gross Power (W)	1100
Max. Carton Size (L x W x H) (mm)	600 x 500 x 500
Min. Carton Size (L x W x H) (mm)	180 x 300 x 130
Speed (m/min)	16
Productive Capacity (pcs/h)	600
Height of Table (mm)	830
Adhesive Tape (mm)	BOPP, PVC Adhesive tape, width 60,76mm
Available Strapping Belt (mm)	Plastic Strapping Belt, Width : 9~15, Thickness : 0.5~1.1
Air Compressor (optional)	2/3 Litres at 5 Bars
External Dimensions (L x W x H) (mm)	6650 x 1420 x 1565
Net Weight (kg)	385

Auto Flap Closer:-



Technical Specification :

Model	Svp102 TRF(Carton Sealer)
	With auto flap closer)
Voltage(V/Hz)	200/50
Maximum Carton Size(LxWxH)mm	500x500x600
Minimum Carton Size(LxWxH)mm	130x130x180
Speed (m/min)	20
Available Adhesive tape	BOOP, water free adhesive tape, PVT adhesive tape
Height of Table (mm)	635-780
Width of Adhesive Tape (mm)	48 60 76
Size(LxWxH)mm	2727x950x(1200-1800)1
Weight(kg)	180
Air Compressor	2/3 Liters at 5 bars

.

Carton Sealer For Small And Standard Cartons:-



Technical Specification :

Model	Svp TU(smaller	102	SvP 102 TU(standerd
	cartons)		cartons)
Voltage(V/Hz)	220/50HZ		200/50
Maximum Carton Size(LxWxH)mm	400x400		500x600
Minimum Carton Size(LxWxH)mm	100x100		140x150
Speed (m/min)	20		20
Available Adhesive tape	PVC adhesive tape,		BOOP BOOP, water free adhesive tape,
	Tape		adhesive tape
Height of Table (mm)	580x780		635-780
Width of Adhesive Tape (mm)	36 48		48 60 76
Size(LxWxH)mm	1730 x 950 x (960 - 1550)		1755x800x(960-1650)
Weight(kg)	115		120
Air Compressor	NA		NA
Power(w)	200		200

Carton Sealer For Bigger Cartons:-



Technical Specification :

Model	SvP 102TU(Heavy Duty)
Voltage(V/Hz)	200/50
Maximum Carton Size(LxWxH)mm	700x800
Minimum Carton Size(LxWxH)mm	130*150
Speed (m/min)	20
Available Adhesive tape	BOOP, water free adhesive tape, PVT adhesive tape
Height of Table (mm)	580-780
Width of Adhesive Tape (mm)	48 60 76
Size(LxWxH)mm	1230x1100x(1620-1820)1
Weight(kg)	130
Air Compressor	NA
Power(w)	300

Pneumatic Operated Automatic Carton Sealer:-



Technical Specification :

Model	Svp 102TR(Pneumatic operated Automatic)	
Voltage(V/Hz)	200/50	
Maximum Size(LxWxH)mm	Carton	500x500
Minimum Size(LxWxH)mm	Carton	180x100
Speed (m/min)	24	
Available Adhesive tape	BOOP, water free adhesive tape, PVC adhesive tape	
Height of Table (mm)	600-780	
Width of Adhesive Tape (mm)	48 60 76	
Size(LxWxH)mm	1970x660x(1280-1460)1	
Weight(kg)	150	
Air Compressor	2/3 Liters at 5 bars	
Power(w)	220	

L-SEALER

Manual L-Sealer:-



Technical Specification :

Model	SPLS-5045M(Manual)
Voltage (V/Hz)	AC 220/50
Power (kw)	1.0
Packing speed (pcs/h)	300~500
Max packaging dimension (L×W×H) (mm)	450×400×250
Max sealing dimension (L×W) (mm)	500×450
Dimension (L×W×H) (mm)	1560×700×1100
Net weight (kg)	80
Body	Powder Coated (M.S. TYPE)

Semi Automatic L Sealer:-



Technical Specification :

Model	SPLS-5045S (Semi Auto)
Voltage (V/Hz)	AC 220/50
Power (kw)	1.2
Packing speed (pcs/h)	800~1200
Max packaging dimension (L×W×H) (mm)	450×400×300
Max sealing dimension (L×W) (mm)	500×450
Dimension (L×W×H) (mm)	1560×757×1040
Net weight (kg)	110
Body	Powder coated (M.S. TYPE)

Automatic L-Sealer:-



Technical Specification :

Model	SPLS-504A
Power Supply	1Ø, 220 V/240 V
Watts	1.5 KW
Sealing Size	L=500 x W = 450 MM
Packing Speed	0~18 m/min
Packing Length (in mm)	100 -460
Packing Width (in mm)	40 – 320
Packing Height (in mm)	5-100
Air Compressor	6 kg /cm ²
Machine Size	L= 1900 x W=950 x H=1450 MM

ELECTRO MAGNETIC INDUCTION CAPPER

Manual electromagnetic induction capper:-



Technical Specification :

Model	SPIS-100
Voltage (V/Hz)	AC 220/50
Power(W)	500
Heal diameter(mm)	20-135
Delivering speed	N/A
Vessel height	Absoluteness
Dimension(LxW H)	340x290x150
Weight(kg)	5
Capacity	0-100 pc./min

Continuous Type Electro Magnetic Induction Capper:-



Technical Specification :

Model	SPIS-200C
Voltage (V/Hz)	220V/50
Power(W)	1.5KW
Heal diameter(mm)	20-135
Delivering speed	20-135
Vessel height	0-10 mt/mint.
Dimension(LxW H)	1150x480x400
Weight(kg)	45kg
Capacity	150pc./mnt(with diameter 100mm,flat capped and PE bottle)

FILLING MACHINE

Liquid Filling Machine:-



Technical Specification :


Model	SPLF-500	SPLF-1000
Voltage (V/Hz)	220/50	220/50
Power (w)	20	20
Gas Pressure (Mpa)	0.4 - 0.6	0.4 - 0.6
Filling Range(ml)	100-500	100-1000
Filling Capacity(times/min)	10-18	10-18
Filling Accuracy	<= 1%	<= 1%
External Dimensions (L xW x H) (cm)	100 x 50 x105	100 x 50 x105
Net Weight(kg)	35	40

Paste Filling Machine:-



Technical Specification :

Model	SPPF-500	SPPF-1000
Voltage (V/Hz)	220/50	220/50
Power (w)	20	20
Gas Pressure (Mpa)	0.4 - 0.6	0.4 - 0.6
Filling Range(ml)	100-500	100-1000
Filling Capacity(times/min)	10-18	10-18
Filling Accuracy	<= 1%	<= 1%
External Dimensions (L xW x H) (cm)	100 x 50 x105	100 x 50 x105
Net Weight(kg)	35	40

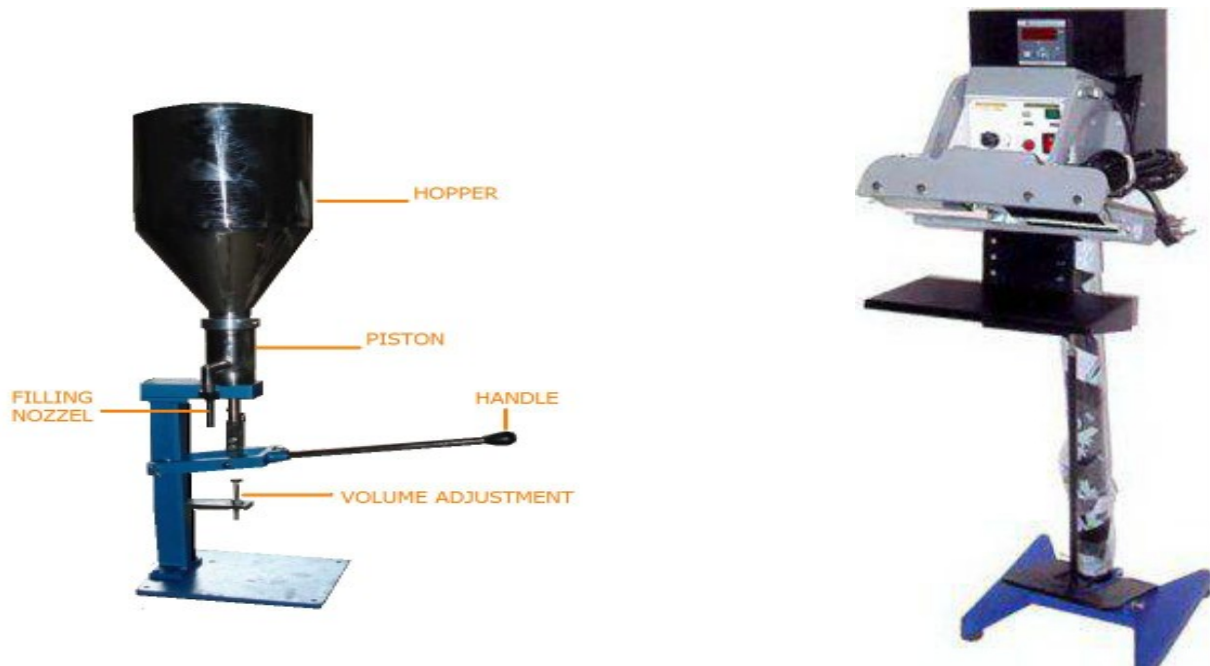

LIQUID PACKING MACHINE

Liquid Packing Machine (Water Pouch Making Machine):-



Technical Specification :

Model	SPLP-500	SPLP-1000
Voltage (V/Hz)	220/50	220/50
Power (w)	1750	1750
Product Capacity(bag/min)	1300-2100	1000
Packing Capacity(ml)	150-150	200-1000

Size of bag(mm)/td>	(L) 50-170(W)50-150	(L) 50-210(W)50-170
Dimension(LxWxH) (mm)	900x780x1780	1050x850x1920
Net Weight(kg)	400	450

SHRINK PACKAGING MACHINE

Shrink Tunnel:-



Technical Specification :

Model	SPS 3020	SPS	SPS 4535 L	SPS 6535 L
Tunnel Size (W x H) mm	300 x 200	450 x 250	450 x 350	650 x 350
Voltage (V/Hz)	220/50	220/50 380 / 50	380/50	380/50

Power Consumption (KW)	4.5	6.5	9.6	12.5
Convayor Loading (Kg)	10	10	30	30
Heating Furnance (l x w x h) mm	900 x 300 x 50-200*	900 x 450 x 50-200*	1200 x 450 x 50-350*	1200 x 650 x 50-350*
External dimensions (l x w x h) (mm)	1200 x 500 x 800	1200 x 650 x 1240	1200 x 650 x 1340	1200 x 850 x 1340
Speed (m/min.)	0~10	0~10	0~10	0~10
Heating Time (minutes)	10	10	10	10
Cooling Time (minutes)	15	15	15	15
Net Weight (Kg)	70	90	120	150

Shrink Chamber:-



Technical Specification :

Model	SP-4535 Manual Type
Voltage (V/Hz)	AC 220 /50
Power (kw)	4
Packing Speed(pcs/h)	700 ~ 1000
Max Packing Dimensions	450 x 300 x 250
Dimensions (L XW X H) (mm)	1895 x 720 x 1080
Max Packing Dimensions	140

Label Shrink Tunnel:-



Technical Specification :

Model	SPS 1230	SPS 1540
Voltage (V/Hz)	3 phase 380 /50	3 phase 380 /50
Power (KW)	10	12
Max. packing size (l xh) (mm)	120 x 300	150 x 400
Packing speed (pcs /hour)	8000 ~ 12000	8000 ~ 12000
Tunnel size (l x w x h)(mm)	1500 x120 x 300	1600 x 150 x 400
External dimensions (l x w xh) (mm)	1800 x 600 x 1665	1900 x 600 x 1665
Net Weight (Kg)	250	300

Web Sealer



Technical Specification :

Model	SPWS -6540 (Web Sealer)	SP5540L-PE (Shrink Tunnel)
Voltage (V/Hz)	300 / 50 3 phase	380 / 50 3 phase
Power Consumption (KW)	1.5	21
Packing Speed (pcs/min)	0~12	0~10
Max Packing dimension	500 x 290 x 380 (L x W x H) (mm)	1450 x 550 x 400
Max sealing length (mm)	650	-
Height of conveyor (mm)	800+50 (Adjustable)	-
Working air pressure (Kgf/m ²)	6	-
Dimension (LxWxH) (mm)	1370 x 920 x 1800	2550 x 850 x 1500
Conveyor Loading(kg)	-	40
Heating Time (Minutes)	-	10
Cooling Time (Minutes)	-	15
Weight (kg)	300	300

SEALING MACHINE

Continuous Band Sealer:-



Technical Specification :

Model	SPCS 900 L	SPCS 900 V
Voltage (V/Hz)	220/50	220/50
Power (W)	650	650
Sealing Speed (m/min)	0 ~ 12 (0 ~ 16)	0 ~ 12 (0 ~ 16)
Sealing Width (mm)	8 ~ 10	8 ~ 10
Temperature range (Deg.C)	0 ~ 300	0 ~ 300
Distance from the sealing center to the conveying table (mm)	10 ~ 40	15 ~ 270
Conveyor size (L x W)mm	840 x 153	840 x 153
Film Thickness (mm)	0.08	0.08
Single Conveyor Loading (Kg)	1	1
Overall Conveyor Loading (Kg)	3	3
Overall Dimension (LxWxH)mm	840 x 380 x 320	840 x 380 x 550
Net Weight (Kg)	32	37

Heavy Duty Continuous Band Sealer:-



Technical Specification :

Model	SPCS 1100
Voltage (V/Hz)	220/50
Power (W)	230
Heat Sealing Power (w)	300x4
Sealing Speed (m/min)	0 ~ 10
Sealing Width (mm)	8 ~ 10
Temperature range (Deg.c)	0 ~ 300
Distance from the sealingcenter to the conveying table (mm)	Nil
Conveyor size (L x W)mm	1400x250
Film Thikness (mm)	0.12 to o.18
Single Conveyor Loading (Kg)	5
Overall Conveyor Loading (Kg)	15
Oerall Dimension (LxWxH) mm	1450 x 680 x 1480
Net Weight (Kg)	107

Air Flushing Continuous Band Sealer:-



Technical Specification :

Model	SPCS 900AF (Air Flushing)
Voltage (V/Hz)	220/50
Power (W)	835
Heat Sealing Power (w)	40x2
Sealing Speed (m/min)	0-12 (0-16)
Sealing Width (mm)	8 ~ 10
Temperature range (Deg.c)	0 ~ 300
Distance from the sealingcenter to the conveying table (mm)	10 ~ 40
Conveyor size (L x W)mm	930x180
Film Thikness (mm)	0.08
Single Conveyor Loading (Kg)	1
Overall Conveyor Loading (Kg)	3
Oerall Dimension (LxWxH) mm	1050 x 560 x 900
Net Weight (Kg)	62

Foot Sealer:-



Technical Specification :

Model	SPFS 450	SPFS 650
	(Impulse type)	(Impulse type)
Sealing Length(mm)	450	650
Sealing Width(mm)	2 ~ 5	2 ~ 5
Input Voltage (V/Hz)	220/50	220/50
Heating Time(sec.)	0 ~ 2.5	0 ~ 2.5
Impulse Power (w)	1200	1500
Case Size(mm)	550 x 520 x 880	700x570x880
Weight (Kg)	21	24

VACUUM PACKAGING MACHINE

Double Chamber:-



Technical Specification :

Model	SPVP 500/2SB
Chamber	Double (SS Hull)
Voltage(V/Hz)	440/50
Vacuum Pump Power (w)	1500
Sealing Power	750
Sealing width(mm)	10
Lowest Pressure Of Vacuum	1
Chamber(KPa)	
Sealing Position Of Vacuum	2
Chamber	
Volume Chamber Bulk	580x550x110
(LxWxH)(mm)	
Sealing length(mm)	500
Air Charging volume For	40
Vacuum pump(m3/h)	
Material for Vacuum Case	Stainless Steel
Dimension(LxWxH)mm	1260x780x960

Single Chamber:-



Technical Specification :

Model	SPVP 400	SPVP 500	SPVP 600
Chamber	Single(Fiber Top)	Single(Fiber Top)	Single(Fiber Top)
Voltage(V/Hz)	220/50	220/50	380/50
Sealing Power(W)	500	750	900
Sealing width(mm)	10	10	10
Sealing Position Of Vacuum Chamber	2	2	2
Volume Chamber Bulk (LxWxH)(mm)	440x420x100	530x525x100	700x620x250
Sealing length(mm)	400	500	600
Air Charging volume For Vacuum pump(m3/h)	20	20	40
Material for Vacuum Case	Fiber	Fiber	Fiber
Dimension(LxWxH)mm	540x480x1010	580x650x1010	760x770x970
Weight(kg)	110	125	150

Vertical Type Vacuum Packing Machine:-



Specification :

Model	SPVP600V (VERTICAL TYPE)
Voltage (V/Hz)	380/50
Sealing Power (W)	600 (1000)
Motor power (W)	750
Air Compressor Power (W)	1100
Sealing Length (mm)	600 700 800 1000
Sealing Width (mm)	10
Distance from Sealing Center to Floor (mm)	1250
Vacuum Pump Rate (m3/h)	20
Film Thickness (Single Layer) (mm)	≤ 0.18
External Dimensions (L×W×H) (mm)	800×900×1900
Net Weight (kg)	255

STRETCH WRAPPING MACHINE

Reel stretch wrapper :-



Technical Specification :

Model	Reel stretch wrapper SPRW-500
Max. Wrapping Size (L×W×H)(Max)(mm)	600x500
Wrapping Efficiency(loads/hour)	20-40
Turntable Speed(rpm/min)	0-12
Turntable Diameter(mm)	70
Turntable Loading(max)(kg)	60
Electrical Requirement	Single Phase() 220V/50HZ
Power(kw)	0.8
Film Carriage	Friction Brake Type
Control System	PCB
Top Plate Device	NIL
Machine Weight(kg)	150
Machine Dimension(mm)	1460×840×149

Box Stretch Wrapper :-



Technical Specification :

Model	Box Wrapper 350	Stretch SPBW	Box Stretch Wrapper SPBW 600
Max Wrapping Size(LXWXH) (Max)(mm)	600 x 600 x 350		600 x 600 x 600
Wrapping Efficiency(loads/hour)	20 ~ 40		20 ~ 40
Turntable Speed(rpm/min)	3~18		3~20
Turntable Diameter(mm)	H:600		H:600
Turntable Loading (max)(kg)	50		50
Electrical requirement (V/Hz)	220 / 50		220 / 50
Power (kw)	0.55		Turntable : 0.75 Film, Carriage :0.4; Steel Tower : 0.37
Film Carriage	Friction Type	Brake	Pre-Stretch Type
Control System	PCB		PLC
Top Plate Device	Pneumatic Type Top Plate		Pneumatic Type Top Plate
Weight (kg)	260 kg		260 kg
Machine Dimension (mm)	600 x 4170 x 1800		600 x 4170 x 1800

Pallet Stretch Wrapping Machine:-



Technical Specification :

Model	Pallet Stretch Wrapping Machine SPSW 2100
Max Wrapping Size(LXWXH) (Max)(mm)	(500 -1200) x (500 -1200)
Wrapping Efficiency(loads/hour)	20 – 40
Turntable Speed(rpm/min)	3-12
Turntable Diameter(mm)	Ø : 1650 / H : 85
Turntable Loading (max)(kg)	2000
Electrical requirement (V/Hz)	220 / 50
Power (kw)	Turntable:0.75 Film, Carriage:0.4; Steel Tower:0.37
Film Carriage	Pre-Stretch Type
Control System	PLC
Top Plate Device	Pneumatic Direct Transmit, Orbit Top Plate
Weight (kg)	800 kg
Machine Dimension (mm)	L Type:2745 x 1650 x 2700 /H Type : 2745 x 1650 x 3300

MATERIAL HANDLING EQUIPMENT

Pallet Trucks:-



Technical Specification :

Model	SPPT 1500	SPPT 2500	SPPT 3000
Capacity(Kg)	1500	2500	3000
Lowered fork height H1(mm)	85	85	85
Total lift height H2(mm)	195	195	195
Fork lenght L1(mm)	1000	1150	1220
Width over the forks B(mm)	520/550	550	685
Steering wheel A(mm)	1180	1180	1180
Front wheelC(mm)	180	180	180
Self weight(Kg)	85	85	85

Hydraulic Reel Pallet Truck:-



Technical Specification :

Model	SPRT 1000
Capacity (Kg)	1000
Diameter of bale (mg)	φ700~φ1200
H. of handleless (mg)	431.5
Fork length (mg)	1150
Width over the forks (mg)	965
Steering wheel (mg)	φ200
Fork wheel (mg)	φ80
Net Weight (Kg)	135

Stacker:-



Technical Specification :

Model	SPS 1000	SPS 2000
Capacity(Kg)	1000	2000
Max lifting height(mm)	1600	1600
Height of forks lower(G)(mm)	85	85
Fork length(E)(mm)	900	900
Adjustable width of the forks(J) £"mm)	200-580	200-580
Lifting speed(mm/stroke)	20	32
Outer width of front leg(M)(mm)	790	830
Front wheel size(mm)	80	80
Rear wheel size(mm)	180	180
Overall size(D\$C\$B)(mm)	2040\$790\$1410	2050\$830\$1460
Self weight(kg)	160	260

CONVEYOR SYSTEM

Gravity Roller Conveyor:-



Technical Specification :

Model	Gravity Roller Conveyor
Roller Type	Zink Steel Roller
Width(mm)	600
Diameter of Roller(mm)	50
Min Height(mm)/td>	125
Length(mm)	1000(Expandable)
Speed Mt/Min	Nil
Power	Nil
Source	Nil

Flexible Conveyors:-



Technical Specification :

Model	Expendable Conveyor	Roller	Expendable Conveyor	Roller
Conveyor Type	Still Conveyor		Motorized Conveyor	
Roller Type	PVC Roller		PVC Roller	
Power Supply	Nil		220/50HZ	
Width of Conveyor(in mm)	600		600	
Length of Conveyor(in mm)	2000-4800		2000-5000	
Loading Capacity (in kg)	80		80	
Conveyor Speed	Nil		15mtr/min	

Belt Conveyors:-



Technical Specification :

Model	Belt Conveyor
Roller Type	Belt Type
Width(mm)	300
Diameter of Roller(mm)	50
Min Height(mm)	500
Length(mm)	300
Speed Mt/Min	15
Power	1.5kw
Source	AC 220/50HZ

Plastic Cap Closing Machine



Technical Specification :

Model	SPCL-40M
Voltage (V/Hz)	220/60
Power (W)	0.37
Cap Diameter (mm)	25x40
Applicable bottle height (mm)	50 - 320
Capacity (bottles/h)	<1200
Types of Cap	Metal Cover
External Dimensions (mm)	350x250x650
Net Weight (kg)	65

PACKAGING MATERIAL:-

- (01) PP BOX STRAPPING ROLLS
- (02) PVC SHRINK FILM ROLL & POUCH
- (03) POLYOLEFIN SHRINK FILM ROLL & POUCH
- (04) STRETCH FILM ROLL
- (05) ALLUMINUM FOIL SEAL
- (06) PET STRAPPING ROLL
- (07) ALLTYPE TAPES
- (08) ALL TYPE LAMINATED POUCHES
- (09) INDUCTION WEDS
- (10) RUBBER BANDS

24 Hour's HELPLINE No.

SUMIT DHIMAN

9634298685

